

CRITCHLEY 9002VF

ISSUE E - 08/05/07

Pontiac Coil – Europe Ltd.

PO Box 246
Queens Drive Industrial Estate
Nottingham NG2 1NQ
United Kingdom
Tel: +44 (0) 115 986 1126
Fax: +44 (0) 115 986 0563



Pontiac Coil

A compact encapsulated line isolating transformer, UL and BSi certified. Tested and approved in accordance with the requirements of EN41003: 1997, EN60950: 1992 (IEC950), EN60065: 1994 and AS/NZS 3260:1993 (BSi Certificate Nos. 7082 and 7456), UL1459, UL1950 and CAN/CSA 234-M90 (E171368 [M]).

ELECTRICAL SPECIFICATION

DC Resistance:
Primary 70.4Ω ± 15%
Secondary 70.4Ω ± 15%

Series O/C Inductance:
measured @ 250mV
200Hz >5.5H
2000Hz >1.5H
4000Hz >1.0H

Series O/C AC Resistance:
measured @ 250mV
200Hz >3KΩ
2000Hz >21KΩ
4000Hz >32KΩ

Leakage Inductance:
200Hz - 4000Hz 18mH max.

Harmonic Distortion:
200Hz, -3dBm on primary, 2f: -77dB max.
600Ω load on secondary, 3f: -75dB max.
TDdBm: -75dBm max.

Insertion Loss:
200Hz - 4000Hz 1.5dB max.
(600Ω ref., 600Ω load)

Frequency Response:
200Hz - 4000Hz ± 0.4dB max.
(600Ω ref., 600Ω load)


Return Loss:
300Hz - 4000Hz >22dB (when using
recommended circuit).
Max. DC current 0mA

ENVIRONMENTAL & SAFETY SPECIFICATION



Voltage Breakdown: Tested according to
EN60950 part 5.3.2.
(test voltage: 3000 Volts).

Storage temperature: Tested to IEC 68-2-14:1984
test procedure Nb.
(temperature range -25°C to +85°C).

CIRCUIT SCHEMATIC

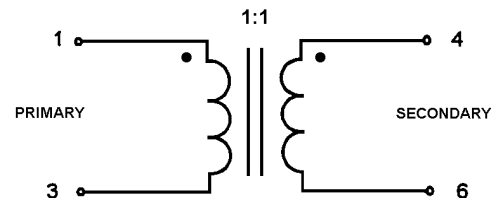


MECHANICAL SPECIFICATION

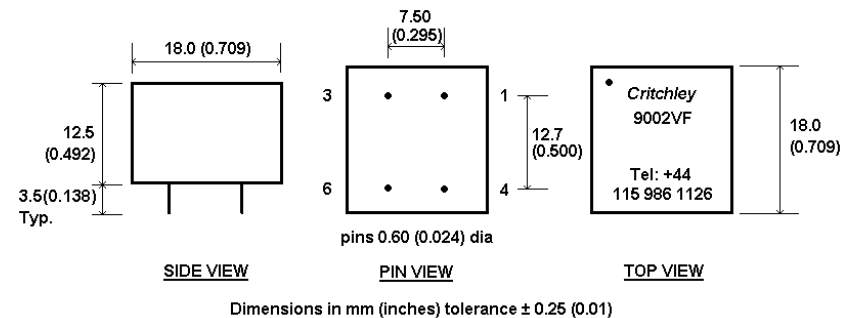


E171368 (M)
CAN/CSA 234-M90

Application Circuits

Reference Impedance (ETS300 001):

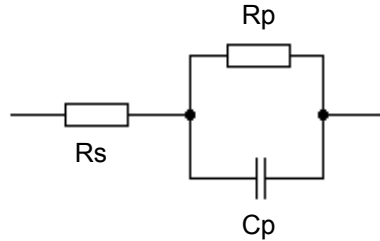

Circuit description:

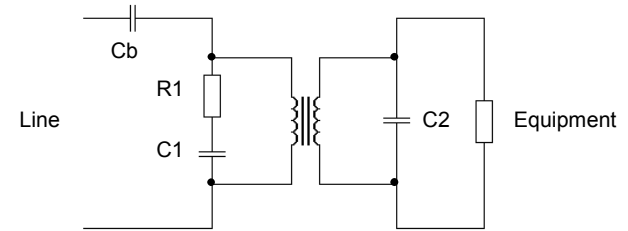

Country	Ref. Impedance Values			Recommended Circuit Values				
	R_s (Ω)	R_p (Ω)	C_p (nF)	C_b (μF)	R_1 (Ω)	C_1 (nF)	C_2 (nF)	Equipment (Ω)
UK, New Zealand	370	620	310	3.3	*523	100	22	*909
Germany, Switzerland	220	820	115	2.2	150	68	22	910
Australia	220	820	120	2.2	330	68	22	910
Sweden, Pan European (TBR 21)	270	750	150	3.3	220	100	-	910
Norway	120	820	110	3.3	150	100	-	910
Austria, Belgium, Canada, France, Finland, Hong Kong, Ireland, Italy, Japan, Netherlands, Portugal, Singapore, Taiwan, USA, Spain, Denmark	600 Ω			6.8	*590	22	33	*523

Notes: *E96 series resistor values.

Country reference networks are subject to change and interpretation. The above is intended as an initial reference and should you require more information for a network not shown please contact your local sales office. Software models are available on disk for all components.